

SPECIFICATION:

For Dip switch configuration, please visit us online at
<http://lcdparts.net/howto/MS615UB.aspx>

MS615 Ver0	Dimension: 125MM(L)X30MM(W)X10MM(H)
------------	-------------------------------------

Default Pin Assignment: (Shorted J2, Shorted J3)

PIN NO	SYMBOL	DESCRIPTION
1,2	VIN	POWER SUPPLY: 12-24V DC*
6	ENA	ENABLED & DISABLED CONTROL: 3.0V ON
4	ADJ	BRIGHTNESS CONTROL: 0-3.5V, 0V=MAX.
3,5	GND	POWER SUPPLY GROUND, P3=NC

Optional Pin Assignment: (Shorted J1 and Shorted J4)

PIN NO	SYMBOL	DESCRIPTION
1,2	VIN	POWER SUPPLY: 12-24V DC *
3	ENA	ENABLED & DISABLED CONTROL: 3.0V ON
4	ADJ	BRIGHTNESS CONTROL: 0-3.5V, 0V=MAX.
5,6	GND	POWER SUPPLY GROUND, P6=NC

Note: ENA disabled when JP2 is shorted.


DC OUTPUT:

LOCATION: CN1, CN2

CONNECTOR TYPE: SM02B-BHSS-1-TB

DESCRIPTION : (2PIN SPACE BETWEEN 3.5MM HORIZONTAL SMD)

PIN	SYMBOL	FUNCTION
1	Red	POWER SUPPLY OUTPUT
2	LV	POWER SUPPLY GROUND

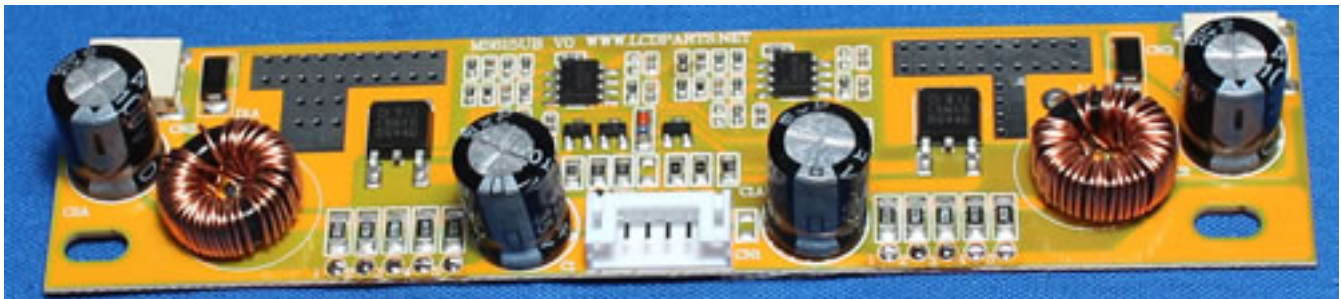

WWW.LCDPARTS.NET

For Dip switch configuration, please visit us online at
<http://lcdparts.net/howto/MS615UB.aspx>